

## Bulb plate panel face

*Ideal for enhancing performance of resistance to mobile or compact loads, our checkered (5-bar pattern) aluminium tread plate is used on floor panels in negative cold rooms.*

### Technical characteristics

4 / 5.5 checkered aluminium plate, maximum dimensions 200 cm x 100 cm.

The metal plates are drilled and cut to meet layout requirements.

The checkered aluminium plate joints are superimposed so as not to coincide with the panel joints (cf. diagram below).

Each plate joint must be at least 20 cm from the nearest parallel panel joint.


After the room has been refrigerated, the plates are fixed with flat head screws.

The stringers must be double and positioned every 20 cm to avoid damage to the underside.




**Example of typical layout :** example of layout of a 440 cm x 320 cm room with door of clear opening 220 cm x 120 cm.

Layout of panels

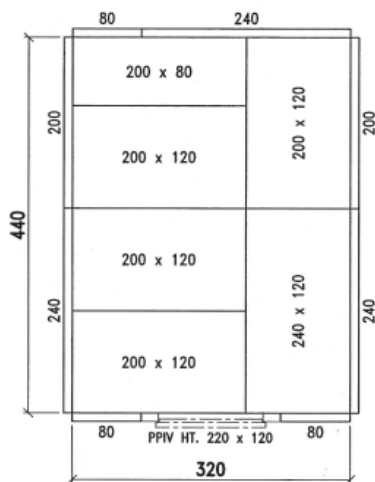

Layout of checkered aluminium plates

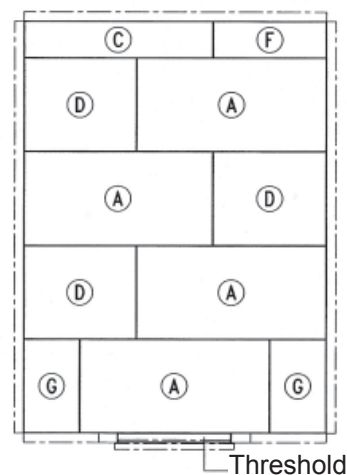

Locator	Dimensions	Quantity
A	2000 x 1000	4
C	2000 x 390	1
D	1194 x 1000	3
F	1194 x 390	1
G	596 x 1000	2
Threshold	1194 x 95	1

